



GT320/GT340/GT360/GT112 Assembly Instructions

Assembly Instructions

It is recommended that the Professionals at your McIntosh Dealer, who are skilled in all aspects of installation and operation of associated audio equipment, install the new Grille Trim Sides to the XLS320, XLS340, XLS360 and XLS112 Loudspeaker Systems. The Loudspeaker Grille illustrated below in figure 1 is for the XLS320 Loudspeaker. The Grilles of the other Loudspeaker Systems are not the same in size and thus require a different number of screws and dowels.

1. Remove from the packing material the two Grille Trim Sides and the bag of mounting hardware.
2. Locate the Loudspeaker Grille and place it with the front of the grille facing down on a clean flat surface with a protective covering so as not to mar the finish of the Grille Trim Sides or the Grille Fabric.
3. Using a Number 2 Philips Screw Driver, remove the screws from both insides of the Loudspeaker Grille.

Note: It might be helpful to use a right angle Screw Driver and place a piece of thin cardboard on top of the Grille Fabric near the head of the screws as you remove and install them. This will protect the Fabric in the event the screw driver blade slips.

4. Remove both Grille Trim Sides from the center portion of the Fabric Covered Loudspeaker Grille.

Note: Retain the screws removed together with the original Grille Trim Side for possible future use.

5. Locate the new Grille Trim Sides and using a suitable tool (small hammer) drive the supplied dowel pins into the large openings located on the inside of the Trim Sides.
6. Orient the Grille Trim Sides to match up with the Left and Right Sides of the center portion of the Loudspeaker Grille.
7. Secure the Grille Trim Sides using the supplied screws, do not over tighten the screws.
8. Orient the Loudspeaker and the Grille with the rounded ends pointing in the same direction.
9. Align the Grille fasteners to the Loudspeaker Grommets on each side. Carefully push down to secure the Grille to the Loudspeaker.

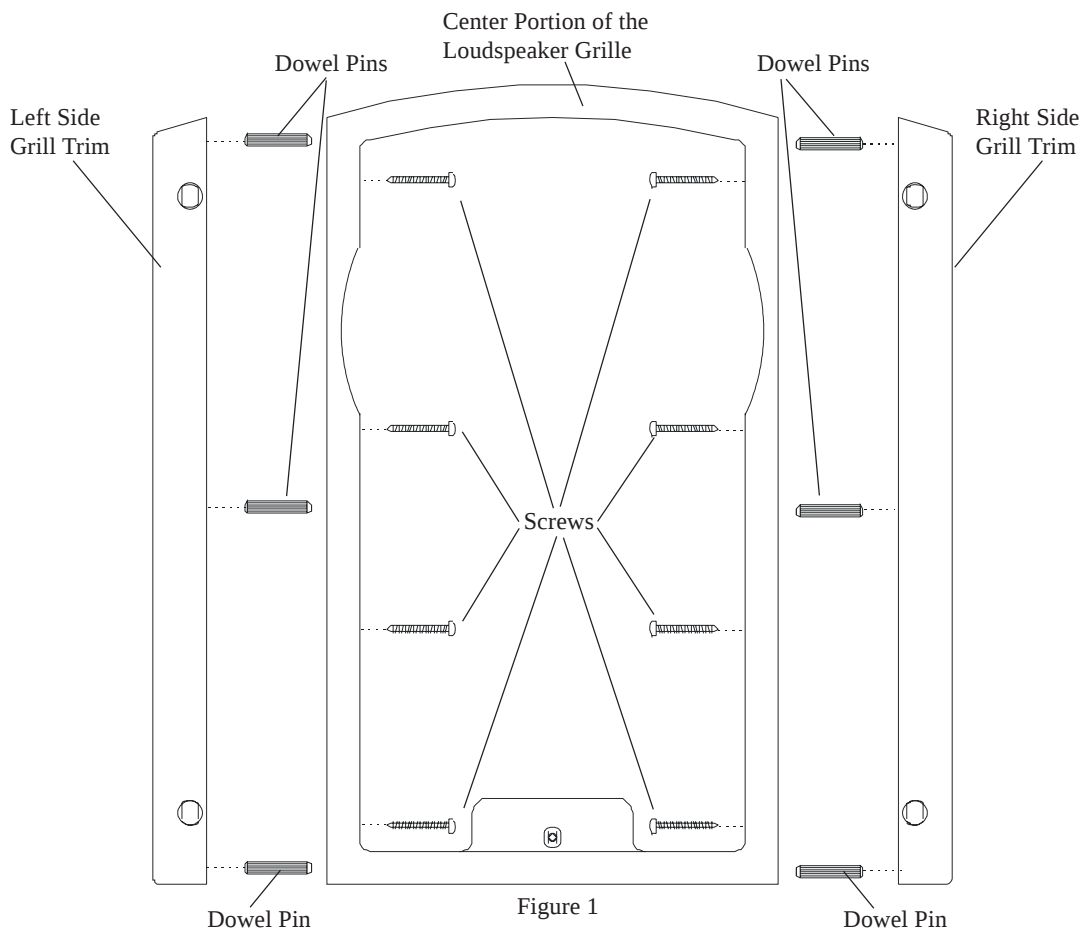


Figure 1

McIntosh Part No. 040943



GT350 Assembly Instructions

Assembly Instructions

It is recommended that the Professionals at your McIntosh Dealer, who are skilled in all aspects of installation and operation of associated audio equipment, install the new Grille Trim Sides to the XCS350 Loudspeaker System. Refer to figure 2.

1. Remove from the packing material the two Grille Trim Sides and the bag of mounting hardware.
2. Locate the Loudspeaker Grille and place it with the front of the grille facing down on a clean flat surface with a protective covering so as not to mar the finish of the Grille Trim Sides or the Grille Fabric.
3. Using a Number 2 Philips Screw Driver, remove the screws from both insides of the Loudspeaker Grille.

Note: It might be helpful to use a right angle Screw Driver and place a piece of thin cardboard on top of the Grille Fabric near the head of the screws as you remove and install them. This will protect the Fabric in the event the screw driver blade slips.

4. Remove both Grille Trim Sides from the center portion of the Fabric Covered Loudspeaker Grille.

Note: Retain the screws removed together with the original Grille Trim Side for possible future use.

5. Locate the new Grille Trim Sides and using a suitable tool (small hammer) drive the supplied dowel pins into the large openings located on the inside of the Trim Sides.

6. Orient the Grille Trim Sides to match up with the Left and Right Sides of the center portion of the Loudspeaker Grille.
7. Secure the Grille Trim Sides using the supplied screws, do not over tighten the screws.
8. Orient the Loudspeaker and the Grille with the rounded ends pointing in the same direction.
9. Align the Grille fasteners to the Loudspeaker Grommets on each side. Carefully push down to secure the Grille to the Loudspeaker.

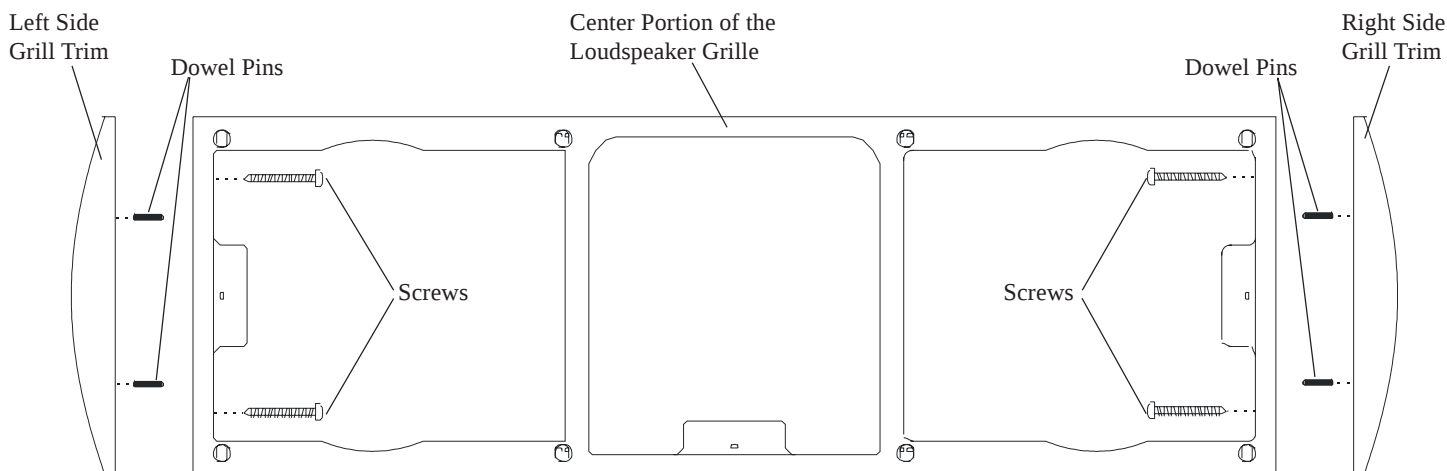


Figure 2