

501

Control Unit

Sales information
1st December 2001




Meridian 501

The 501 Control Unit is a high-quality full-function analogue preamplifier for use with any traditional high-performance audio system. Often found alongside the Meridian 556 power amplifier, 501 provides a flexible front end for a superb sounding two-channel system.

The 501 Control Unit combines major advances in audio and engineering design.

It is a high quality full-function preamplifier for use with high performance analogue sources. It provides six audio inputs, each of which can be individually adjusted for sensitivity, and identified on the four-character alphanumeric display. A high quality MC or MM phono stage is available as an option for the dedicated LP input.

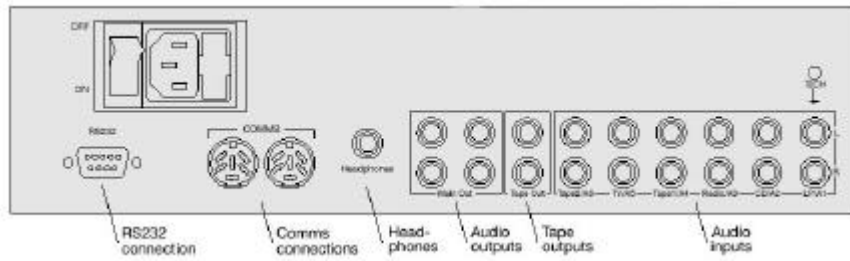

Technical Specification

Distortion:	Less than 0.01% input to output.
Signal/Noise:	Less than -90dB for high-level analogue inputs. Less than -70dB for MM input. Less than -60dB for MC input.
MM option:	Sensitivity adjustable 0.5-3mV for 5cm/s @ 1kHz. Overload point 47mV @ 1kHz. Cartridge load 47k ohms + 100 pF.
MC option:	Sensitivity adjustable 38-210µV for 5cm/s @ 1kHz. Cartridge load 220 ohms + 10nF.
Inputs:	6 unbalanced on phono, 27-150mV (impedance 20k ohms).
Outputs:	2 unbalanced on phono, 1.4-3Vrms maximum.
Tape output:	Unbalanced, 1.5V
Headphone:	2V maximum output
Comms:	Two 5-pin 240° DIN sockets, RS232 interface.
Construction:	Black textured enamel and glass finish.
Dimensions:	88mm (3.46in) H, 321 (12.64) W, 332 (13.07) D Weight 5kg (10lbs)
Controls:	Front-panel controls for Source, Copy, Mute, Display, Volume up/down, Off. Full remote control of all features via MSR.
Front Display:	4-character dot-matrix LED display

Meridian Audio Limited

Stonehill, Stukeley Meadows
Huntingdon
Cambridgeshire PE29 6EX
T +44 (0) 1480 445678
F +44 (0) 1480 445686

Meridian America Inc.

Suite 122, Building 2400
3800 Camp Creek Parkway
Atlanta GA 30331
T (404) 344 7111
F (404) 346 7111

BOOTHROYD STUART
MERIDIAN

www.meridian-audio.com